

MD-3000-HE

Automatic horizontal plastic strapping machine




- *Easy installation*
- *All-electric operation*
- *Polyester and polypropylene strapping from 9-16 mm*
- *Programmable strapping patterns*

MD-3000-HE

Automatic horizontal plastic strapping machine

The MD-3000-HE automatic plastic strapping machine is designed for packaging applications that require horizontal strapping. The MD-3000-HE can accommodate a wide variety of products and can be easily integrated with new or existing conveyor lines. With standard features that include automatic strap loading, the MD-3000-HE provides maximum uptime.

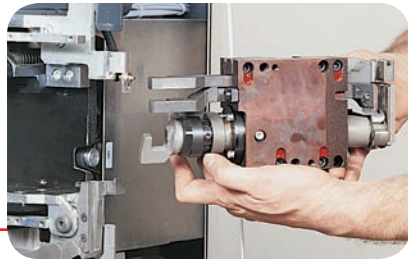

MD Strapping Head

The MD-3000-HE machine utilizes the revolutionary clutchless, multi-motor MD strapping head with Signode's patented SwingWeld™ technology. Designed for reliable, low maintenance operation, the MD strapping head comes with a variety of features that make it simple to operate and easy to maintain.

- Sealing module can be easily exchanged to minimize downtime (see photo above)
- Simple strap feeding and loading decreases changeover time
- Fewer wearing parts lower maintenance costs
- Fixed settings eliminate adjustments
- High tension winder ensures consistent strap tension on every strap

High joint strength

Signode's patented SwingWeld technology is a vibration-weld that provides high joint strengths for maximum package reliability and performance.

Adjustable strapping patterns

The MD-3000-HE can accommodate up to 10 different strapping positions. Strapping positions are set by manually moving reflectors on the guard rail to selected locations.

Maximum package protection

The MD-3000-HE torque drive system ensures optimum approach speed for the strapping head and chute to ensure load stability and minimize product damage.

Options

- Non-standard chute sizes
- Spare strap dispenser
- Low strap indicator on the DF-13 and DF-14 dispenser
- Strap centering device
- 12" minimum load height
- 10 programs with up to 10 strap positions per program
- Spare sealing module

Specifications

Minimum load height: 24" (610 mm)

Feed and take-up speed:
5 to 13.5' (2 to 4 m) per second

Strap requirements:
9-16 mm polyester and polypropylene strapping

Strap tension:
Adjustable from 22.5 to 550 lbs (100 to 2500 N)

Electrical:
230-480v, 3Phase, 60Hz

Shipping weight:
2,310 lbs (1050 kg)



Signode Packaging Systems
3610 West Lake Avenue
Glenview, Illinois 60026
1-800-323-2464
www.signode.com