
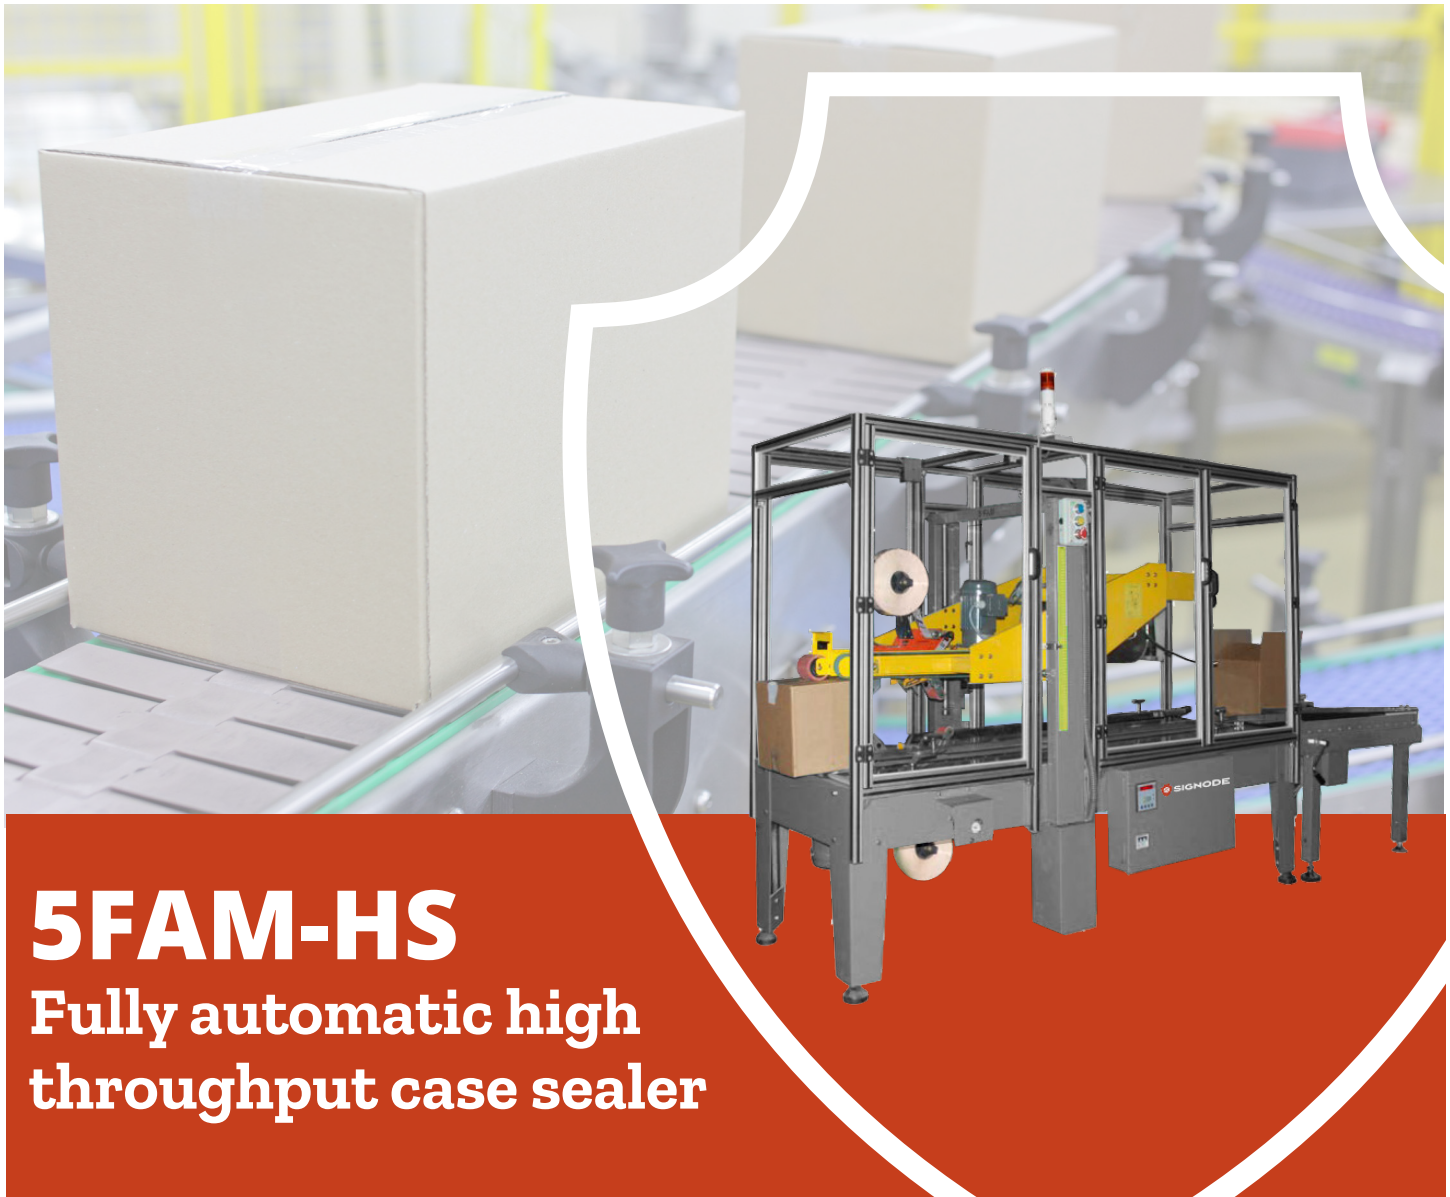


5FAM-HS

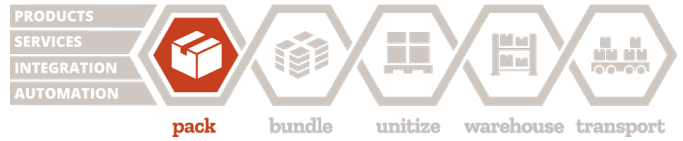

5FAM-HS Fully automatic high throughput case sealer

Productivity Focus

Performance operating speed of up to 35 cartons per minute

Easy Maintenance

Easy access to motors, electrical components and belts for maintenance

Production Versatility

Wide range of supported case sizes to meet customer requirements

Operator Friendly

Easy to operate with simple controls and intuitive tape roll replacement

5FAM-HS

Fully automatic case sealer



Features and Benefits

- Automatic four flap closer
- High speed BOPP tape application
- Auto On/Off feature enables power saving during idle time
- Total and batch counter for monitoring packing volumes
- No tape indicator through visual tower lamp and audible alert
- Powered up/down of top drive set for quick carton change
- Electrical interlocks
- PLC based logic controller
- Front stop for carton flow regulation



Utility Requirements

Power	415 VAC, 3 Phase, 50 Hz
Consumption	0.6 KW
Pneumatic	5 Bar, 0.8 Liters per cycle

Case Dimensions

Length	200mm to 570mm
Width	200mm to 550mm
Height	150mm to 500mm
Weight	5 to 40 Kg
Carton Ply	Minimum 3 Ply

Technical Specifications

Tape Head	Flexible (2", 2.5", 3")
Tape Roll Length	65 M / 650 M / 1000 M
Machine Length	2100mm
Machine Width	830mm
Machine Height	1530mm
Weight	350 Kg
Drive Motor	0.25 HP, 3 No.
Throughput	Up to 35 cartons / minute

Available Options

- Centering infeed conveyor
- Idle buffering conveyor