


# FTM

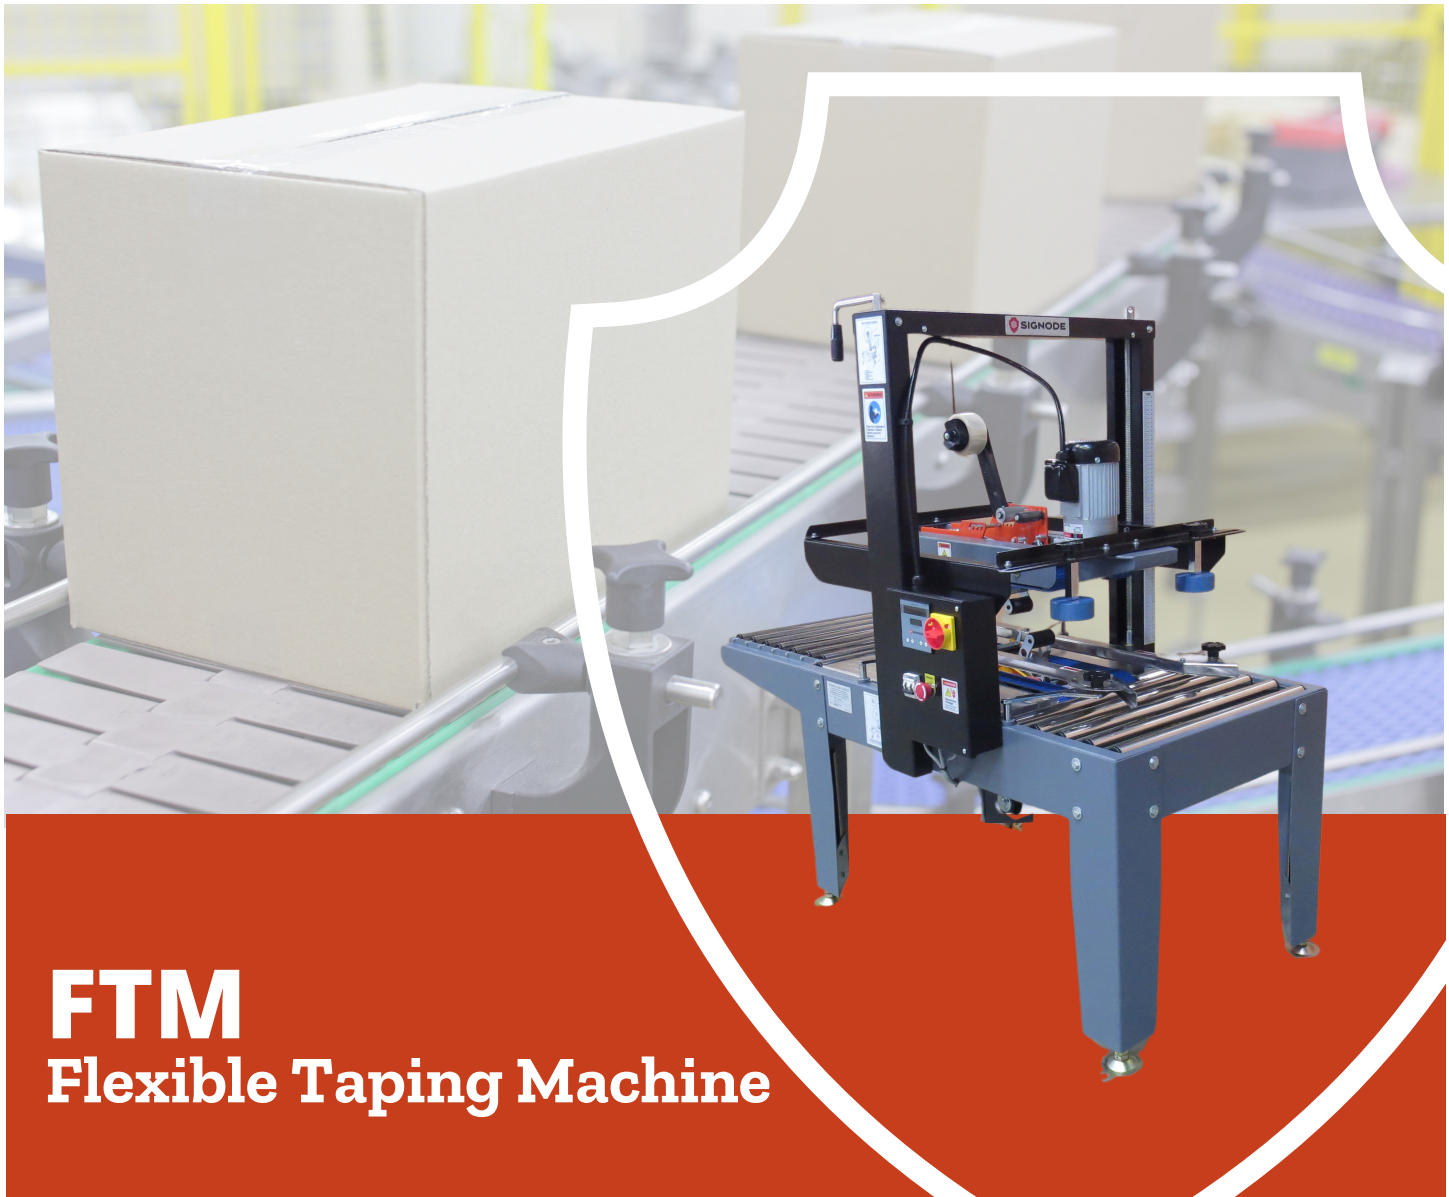

## FTM Flexible Taping Machine

### Productivity Focus

Performance operating  
speed of 20 meters  
per minute

### Easy Maintenance

Easy access to motors,  
electrical components and  
belts for maintenance

### Production Versatility


Wide range of supported  
case sizes to meet customer  
requirements

### Operator Friendly

Easy to operate with simple  
controls and intuitive tape  
roll replacement

# FTM

## Flexible Taping Machine

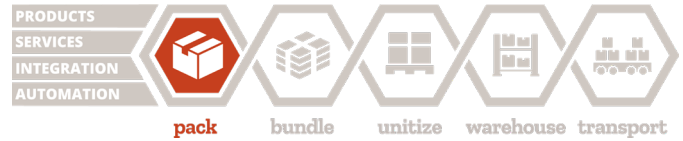

### Features and Benefits

- Twin mast column for greater stability during operation
- Auto On/Off enables power saving during idle time
- Digital carton counter
- Separate top and bottom drive for smooth and uniform taping
- Uniform and controlled pressure during taping
- Twin flap squeeze rollers provides additional pressure for improved top alignment
- Built in toolbox for ease of maintenance
- Self-centering side guides for accurate carton centering
- Positive top and bottom drive to accommodate sealing of tall and heavy cartons, in addition to regular cartons
- 500mm of extra conveyor at either entry or exit for ease of operation
- Telescopic legs for height adjustment
- In-built Emergency Stop and LOTO
- Scale for measuring box height
- Belt and Blade guards for Operator safety



### Utility Requirements

Power	230 VAC, 1 Phase, 50 Hz
Consumption	0.4 KW
Pneumatic	NA

### Case Dimensions

Length (mm)	150mm to Unlimited
Width (mm)	160mm to 550mm
Height (mm)	120 with 2", 150 with 2.5" - max. 550
Weight	2 to 40 Kg
Carton Ply	3 & 5

### Technical Specifications

Tape Head	Flexible (2", 2.5") *Optional - Standard Head (2", 2.5", 3")
Tape Roll Length	65 M / 650 M / 1000 M
Machine Length	1580mm
Machine Width	850mm
Machine Height	1530mm
Weight	160 Kg
Drive Motor	0.25 HP, 2 No.
Belt Speed	20 m / minute
Throughput	Belt speed / (carton length + 280mm)

- \* Options Available:
- \* CE Certification
- \* Safety guard with interlocks