
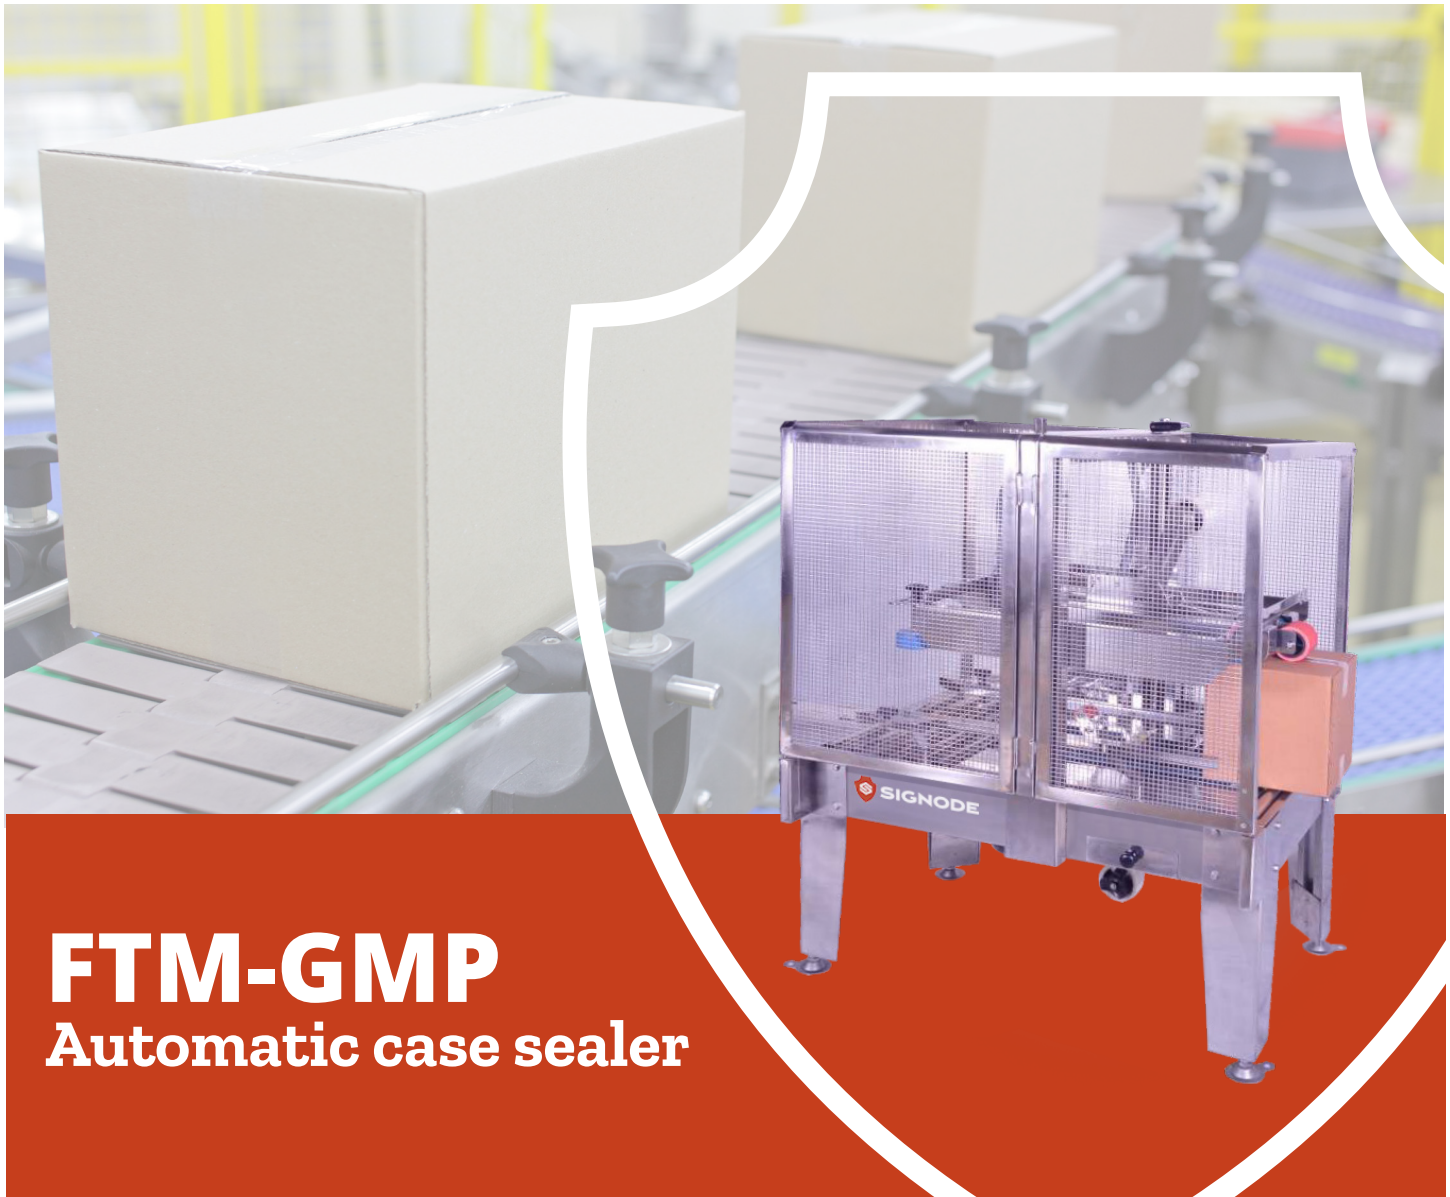


FTM-GMP

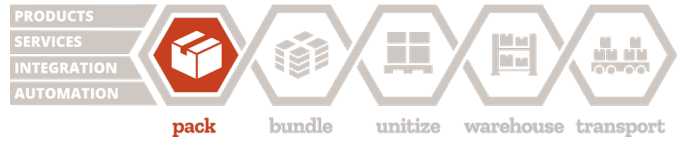

Productivity Focus

Performance operating speed of 20 meters per minute

Easy Maintenance

Easy access to motors, electrical components and belts for maintenance

Production Versatility

Wide range of supported case sizes to meet customer requirements

Operator Friendly

Easy to operate with simple controls and intuitive tape roll replacement

FTM-GMP

Automatic case sealer



Features and Benefits

- Constructed of 304 stainless steel (GMP standard)
- Auto On/Off enables power saving during idle time
- Telescopic legs for height adjustment
- Positive top and bottom drive to accommodate sealing of tall and heavy cartons, in addition to regular cartons
- Robust design for pharmaceutical and food industries
- Carton counter with electronic digital display
- Built in toolbox for ease of maintenance
- Transfer belt guards
- In-built Emergency Stop and LOTO
- Blade guards for operator safety



Utility Requirements

Power	230 VAC, 1 Phase, 50 Hz
Consumption	0.4 KW
Pneumatic	NA

Case Dimensions

Length	150mm to Unlimited
Width	160mm to 550mm
Height	120 with 2", 150 with 2.5" - max. 550
Weight	2 to 40 Kg
Carton Ply	3 & 5

Technical Specifications

Tape Head	Flexible (2", 2.5") *Optional - Standard Head (2", 2.5", 3")
Tape Roll Length	65 M / 650 M / 1000 M
Machine Length	1080mm
Machine Width	800mm
Machine Height	1530mm
Drive Motor	0.25 HP, 2 No.
Belt Speed	20 m / minute
Throughput	Belt speed / (carton length + 280mm)

Options Available

- 304 stainless steel entry conveyors (0.5 or 1.0 meter lengths)
- 304 stainless steel exit conveyors (0.5 or 1.0 meter lengths)