


4AM

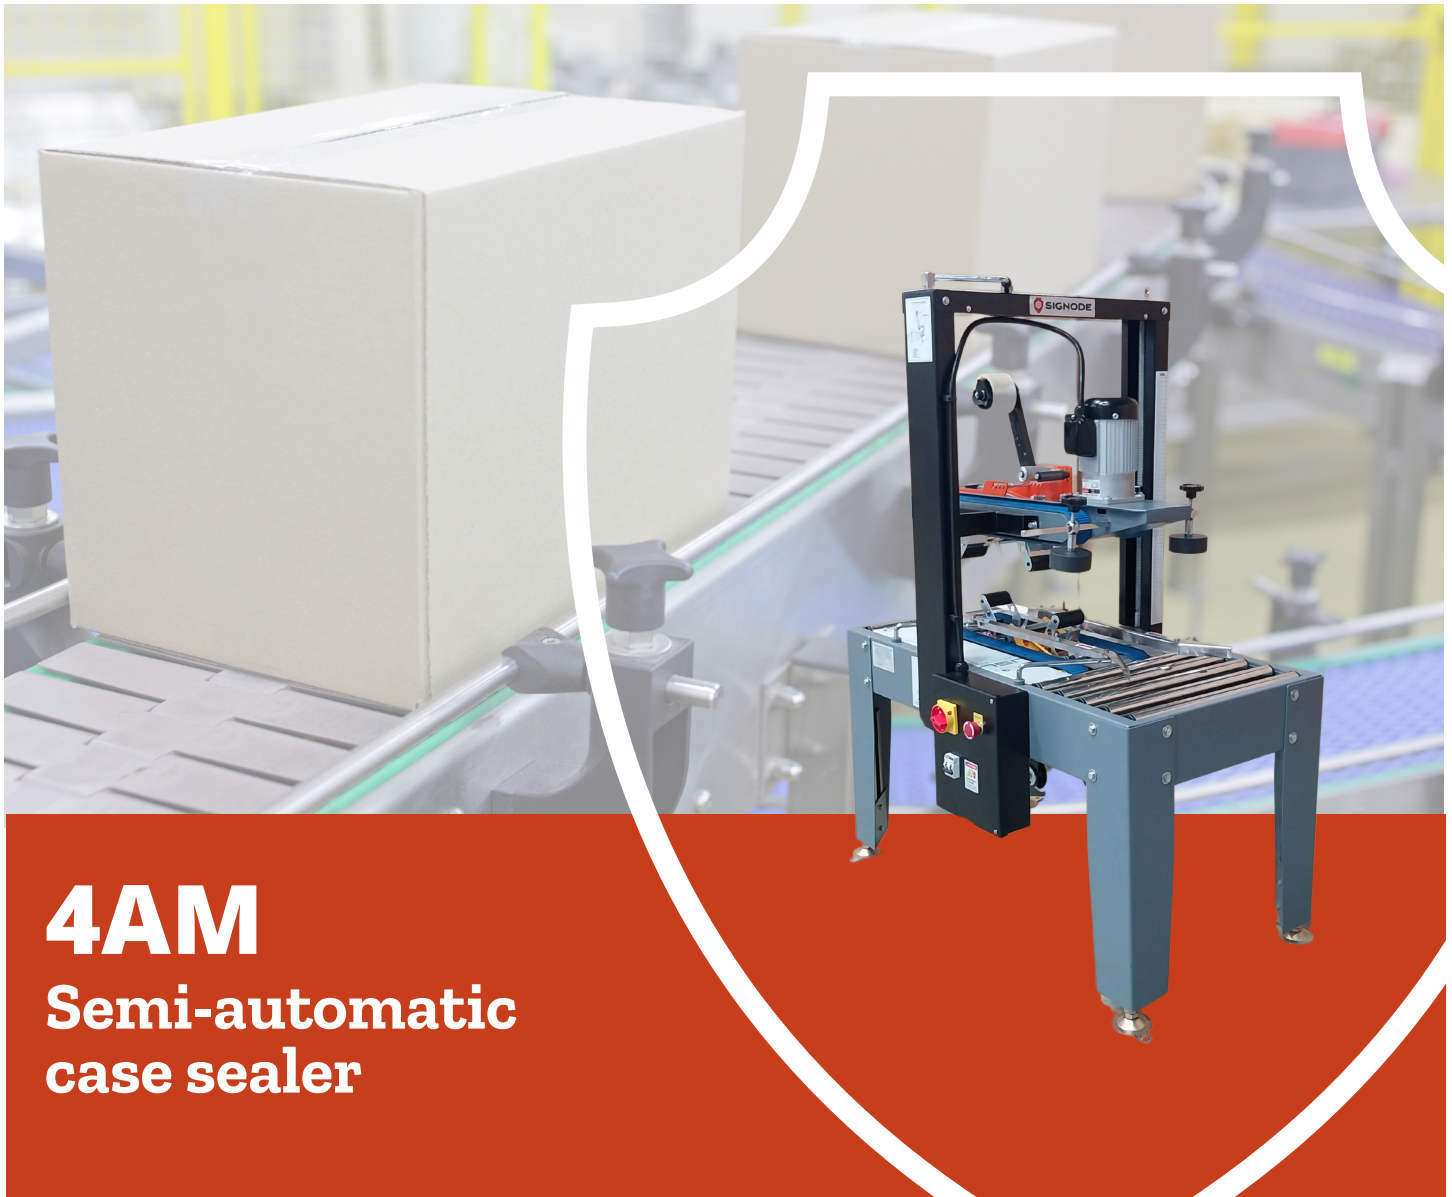

Productivity Focus

Performance operating speed of 20 meters per minute

Easy Maintenance

Easy access to motors, electrical components and belts for maintenance

Production Versatility

Wide range of supported case sizes to meet customer requirements

Operator Friendly

Easy to operate with simple controls and intuitive tape roll replacement

4AM

Semi-automatic case sealer



Features and Benefits

- Ideal for batch production
- Twin mast column for greater stability during operation
- Separate top and bottom drive for consistent taping
- Uniform and controlled pressure during taping
- Twin flap squeeze rollers secures flap centering
- Blade guards for operator safety
- Built in toolbox
- Self centering side guides for accurate centering
- Positive top and bottom drive to perform sealing of tall and heavy cartons, in addition to regular cartons
- In-built Emergency Stop and LOTO
- Scale for measuring box height



Utility Requirements

Power	230 VAC, 1 Phase, 50 Hz
Consumption	0.4 KW
Pneumatic	NA

Case Dimensions

Length (mm)	150mm to Unlimited
Width (mm)	160mm to 450mm
Height (mm)	120 with 2", 150 with 2.5" - max. 550
Weight	2 to 50 Kg
Carton Ply	3 & 5

Technical Specifications

Tape Head	Flexible (2", 2.5") *Optional - Standard Head (2", 2.5", 3")
Tape Roll Length	65 M / 650 M / 1000 M
Machine Length	1080mm
Machine Width	750 mm
Machine Height	1530 mm
Bed Height	650 to 800 mm (adjustable)
Weight*	143 Kg
Drive Motor	0.25 HP, 2 No.
Belt Speed	20m / minute

Options Available

- Idle roller conveyor 0.5 / 1.0 meter length
- Safety guards with interlocks