


CW

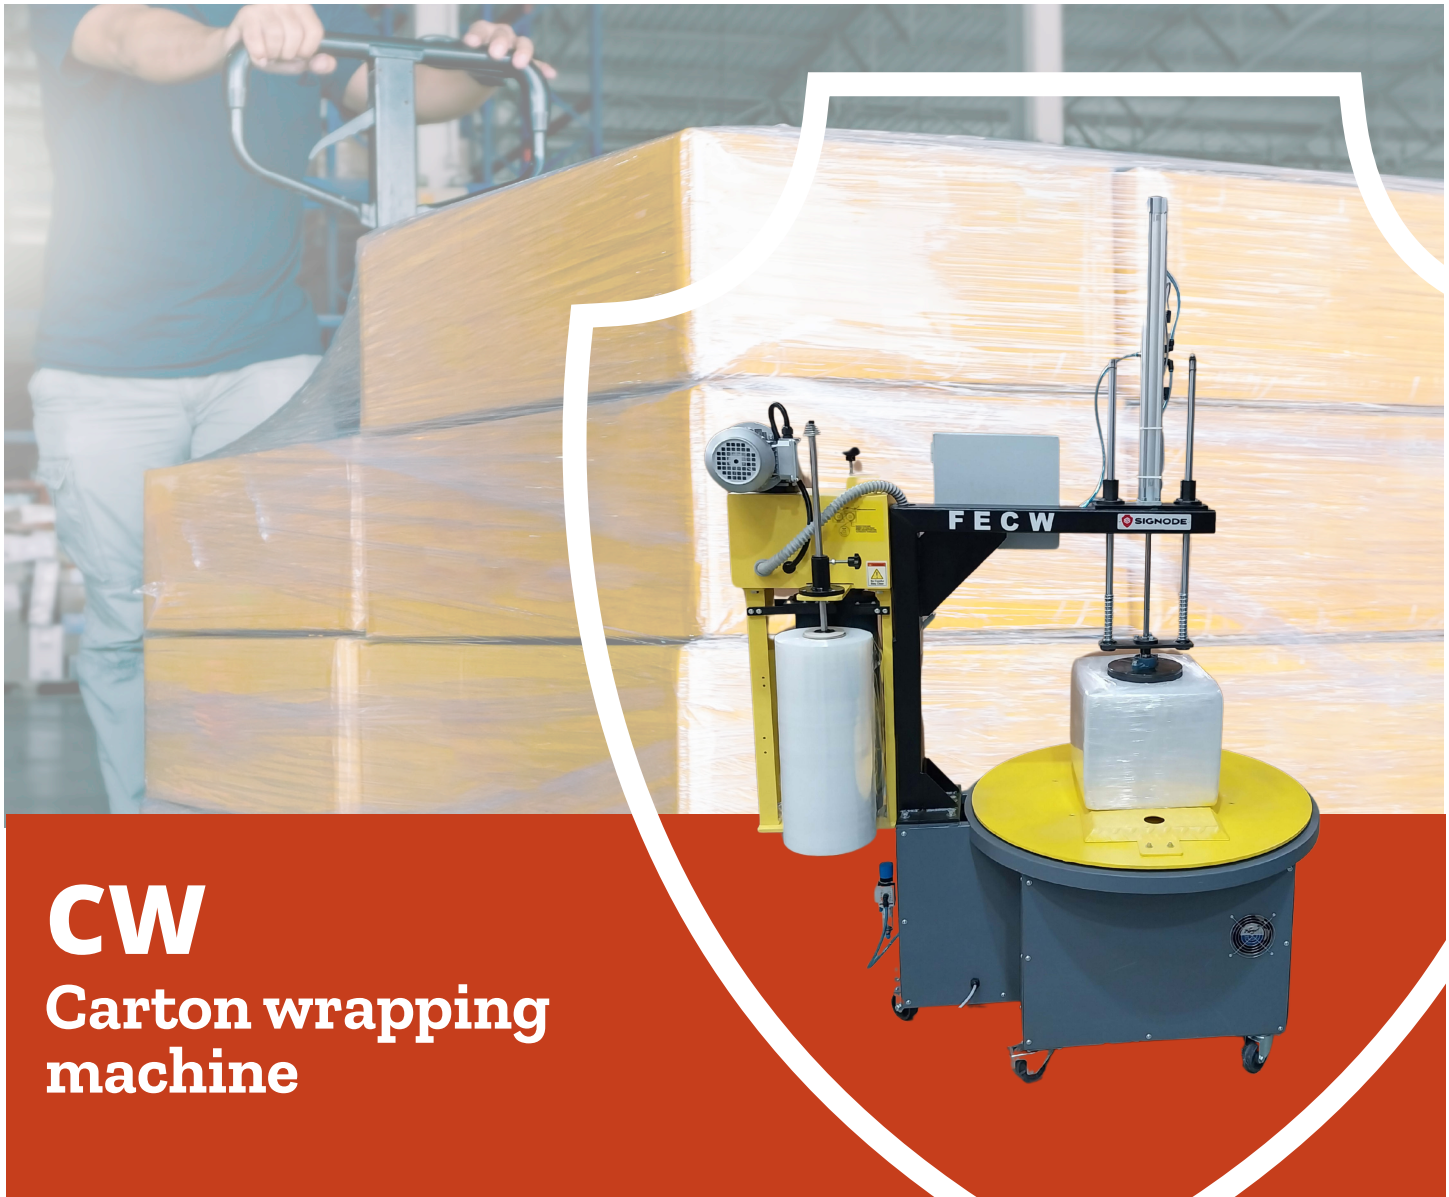

CW

Carton wrapping machine

Productivity Focus

Wrap individual cartons at a convenient height for the operator.

Easy Maintenance

Easy access to motors and electrical components for maintenance

Simplified Integration

Requires minimal set-up and less floor space than comparable wrappers

Operator Friendly

Easy to operate with simple controls and intuitive stretch film replacement

CW

Carton wrapping machine



Features and Benefits

- Highly reliable AC drives and motors
- Powered pre-stretch variable up to 300%
- Independent film tension adjustment for wrapping both lightweight and heavy cartons
- PLC controlled function with digital display of stretch percentage and weight of the film consumed per carton
- Convenient operating height
- Top holding attachment for securing cartons in place while wrapping



Utility Requirements / Electrical

Power	230 VAC, 1 Phase, 50 Hz, 16 A
Consumption	1.0 KW
Air Requirement	4 to 5 Bar - Filtered air

Carton Dimensions

Length	200mm to 750mm
Width	200mm to 500mm
Height	200mm to 450mm
Diagonal	910mm
Weight	150 Kg Maximum

Machine Dimensions

Length	1515mm
Width	910mm
Height	1630mm
Weight	320 Kg

Technical Specifications

Turntable Speed	upto 20 RPM (VFD Control)
Turntable Diameter	910mm
Turntable Rollers	Tapered Bearing
Turntable Drive	Gear (worm) Reducer
Turntable Motor	0.5 HP, 415 VAC, 3 Ph, 50 Hz
Pre-Stretch Type	Powered
Film Stretch	Variable up to 300%
Film Roll Width	250mm to 500mm
Film Roll Diameter	254mm (10") Maximum
Core Size	76.2mm (3")
Elongation	Up to 300%
Film thickness	21 to 29 µm